



0,33-37
m³/min

12-1307
cfm


16
bar

JOURNEY
OF
AIR

COMPRESSED AIR STERILE FILTERS

Advantages

- Specially designed for medical compressed air plants
- Partical removal down to 0.01 micron
- Suitable for steam sterilisation in an autoclave

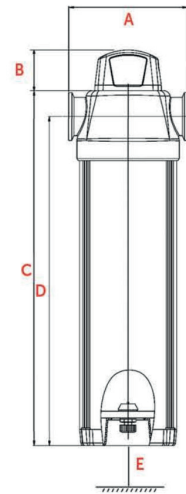

MODEL	Max. Pressure		Capacity		Connec- tion Size	Dimensions (mm)				
	bar	psi	m ³ /min	cfm		A	B	C	D	E
G 20 MSS	16	232	0,33	12	G 1/4"	72	19	193	100	22
G 25 MSS	16	232	0,42	15	G 1/4"	72	19	193	100	22
G 40 MSS	16	232	0,67	24	G 3/8"	96	20	237	110	22
G 50 MSS	16	232	0,83	30	G 3/8"	96	20	237	110	22
G 100 MSS	16	232	1,67	59	G 1/2"	96	20	237	150	22
G 150 MSS	16	232	2,50	88	G 3/4"	117	34	375	190	56
G 200 MSS	16	232	3,33	118	G 3/4"	117	34	375	250	56
G 250 MSS	16	232	4,17	147	G 1"	117	34	465	300	56
G 300 MSS	16	232	5,00	177	G 1 1/4"	117	34	465	350	56
G 500 MSS	16	232	8,33	294	G 1 1/4"	117	34	530	380	56
G 600 MSS	16	232	10,0	353	G 1 1/2"	117	34	530	425	56
G 851 MSS	16	232	14,2	501	G 2"	170	64	722	480	56
G 1210 MSS	16	232	20,2	712	G 2"	170	64	722	550	56
G 1520 MSS	16	232	25,3	895	G 2 1/2"	235	72	760	430	56
G 1820 MSS	16	232	30,3	1071	G 3"	235	72	760	550	56
G 2220 MSS	16	232	37,0	1307	G 3"	235	72	760	600	56

